


Z-Series Aluminized Polyester, Adhesive-Backed Tape

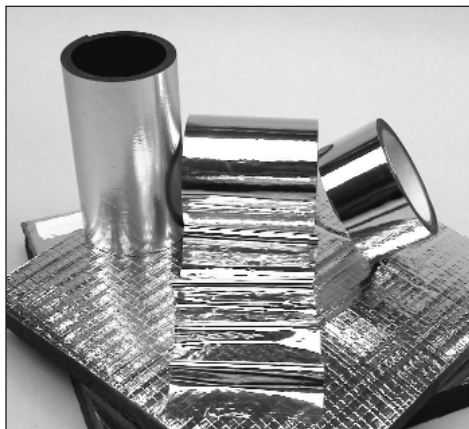

Product Applications

Acoustical foam edge-sealing

Enclosure seals

Reflective marking

Decorative trim

Fastening and splicing

- UV resistant
- Solvent resistant
- Good long-term aging
- Withstands high temperatures
- Easy to apply
- Good bonding strength

Z-Series tape, from E-A-R Specialty Composites, comprises a durable aluminized polyester film backed with an acrylic adhesive system that resists environmental degradation and exposure to solvents. The 2-mil tape exhibits good adhesion, tensile strength and elongation properties, and it can be utilized for numerous sealing and fastening applications. It is compatible with E-A-R's TUFCOTE® RM and SM series of acoustical foams, both for splicing and edge-sealing.

E-A-R offers the versatile tape in 2-inch- (Z-32) and 4-inch-wide (Z-34) rolls of 72 linear yards.

Z-Series Tape

Typical Properties

Substrate	Metalized polyester
Substrate thickness (in.)	0.001
Adhesive	Acrylic
Adhesive thickness (in.)	0.001
Adhesion (oz.)	40
Tensile strength (lb./in.)	18
Elongation (%)	100